


RADO 6 (RA-40692)



Product description

With recessing box

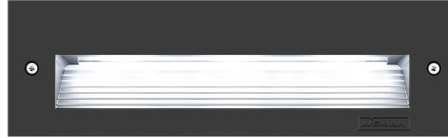

Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

Light symbol



G

Product colour



01- Black (RAL 9011)    02- Dark Grey (RAL 7043)    03- White (RAL 9003)    05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

Special finishes upon request




SU01- Concrete Urban    SU02- Softscape Urban    SU03- Stone Urban    SU04- Corten Urban



SW01- OAK Woodland



SW02- Walnut Woodland



SW03- PINE Woodland

Technical information

Light source	30 LED
Light source type	LED
Dimming type	On/Off
Material	Aluminium
Weight	2.5 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	11 W
Lumen	438 - 471 lm
Efficacy	40 - 43 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz




Optic	G [31°x88°]
Bug	B0-U2-G1
ULR	4%
ULOR	4%
CIE flux code n°3	91
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	23,000
Lifetime L80B10 (hrs)	45,000
Lifetime L80B50 (hrs)	49,000

**RADO 6 (RA-40692)**

Product variants

HOW TO SPECIFY

LIGA	-	RA-40692	-	500	-	G	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
RA-40692	500 11W	G	8030	ND	01 BLACK							
			8040		02 DARK GREY							
					03 WHITE							
					05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

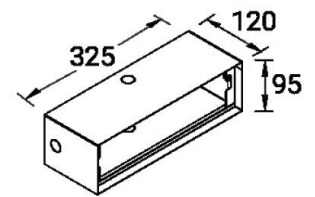

RECESSING BOX