


VANCOUVER 33 (VA-10051)



Product description

160x160 mm - 1000 mm - No decorative pattern

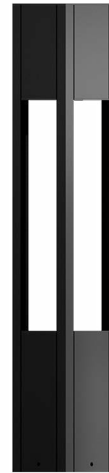

Luminaire structure

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear

Light symbol




G

Product colour



Special finishes upon request

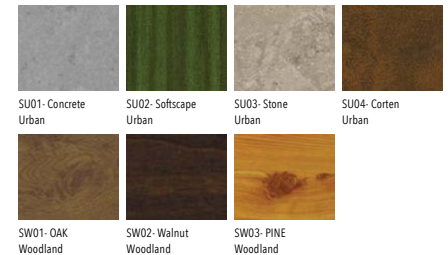

Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	11 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	15 W
Lumen	1007 - 1083 lm
Efficacy	67 - 72 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [143°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	61,000

VANCOUVER 33 (VA-10051)

Product variants

HOW TO SPECIFY

LIGA	-	VA-10051	-	350	-	G	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
VA-10051	350 15W	G	8030	ND	01 BLACK							
			8040	DALI	02 DARK GREY							
					03 WHITE							
					05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

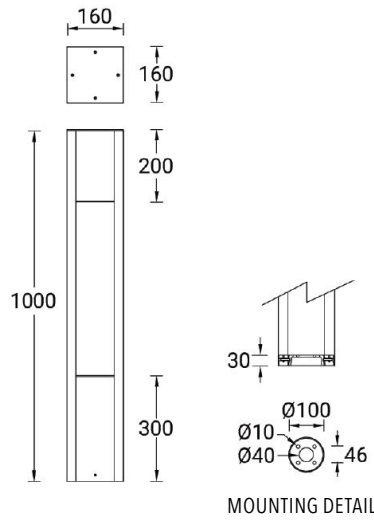

Accessories



Anchor Bolt
LIGA - A12191