

**PALETTA 3 (PA-31572)**



**Product description**

265x265 mm



**Luminaire structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

**Light symbol**



0

**Product colour**




01- Black (RAL 9011)    02- Dark Grey (RAL 7043)    03- White (RAL 9003)    05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

**Special finishes upon request**




SU01- Concrete Urban    SU02- Softscape Urban    SU03- Stone Urban    SU04- Corten Urban



SW01- OAK Woodland



SW02- Walnut Woodland



SW03- PINE Woodland

**Technical information**

Light source	80 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	3.0 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	19 W
Lumen	1677 - 1765 lm
Efficacy	88 - 93 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	600 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	0 [117°x117°]
Bug	B0-U1-G0
ULR	2%
ULOR	2%
CIE flux code n°3	94
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	15,000
Lifetime L80B10 (hrs)	30,000
Lifetime L80B50 (hrs)	34,000

PALETTA 3 (PA-31572)

Product variants

HOW TO SPECIFY

LIGA	- PA-31572	- 600	- 8030	- ND	- 01
	<b>MODEL</b>	<b>OUTPUT</b>	<b>CRI/CCT</b>	<b>DIMMING</b>	<b>COLOUR FINISH</b>
	PA-31572	600 19W	8030	ND	01 BLACK
			8040	DALI	02 DARK GREY
					03 WHITE
					05 MATT SILVER
					06 BRONZE
					S - SPECIAL FINISH

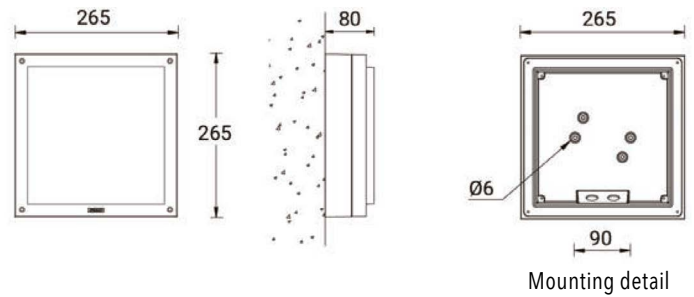

Accessories



Surface mounting box for easy cabling (PALETTA 3)  
LIGA-SCE-PALETTA-3