


**VANCOUVER 31 (VA-10101)**



**Product description**

120x120 mm - 600 mm - No decorative pattern

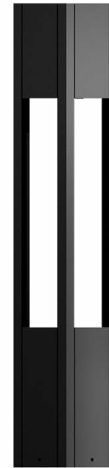

**Luminaire structure**

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear

**Light symbol**




G

**Product colour**



**Special finishes upon request**

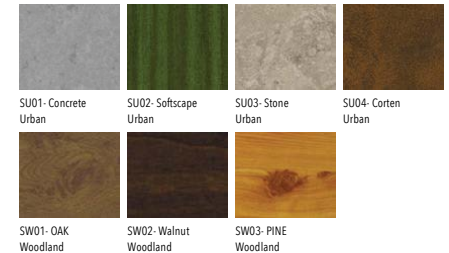

**Technical information**

Light source	1 COB
Light source type	COB
Dimming type	On/Off
Material	Aluminium
Weight	12 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	7 W
Lumen	192 - 200 lm
Efficacy	27 - 29 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	250 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [34°]
-------	---------

**VANCOUVER 31 (VA-10101)**

Product variants

HOW TO SPECIFY

LIGA	-	VA-10101	-	250	-	G	-	8030	-	ND	-	01
		<b>MODEL</b>		<b>OUTPUT</b>		<b>DISTRIBUTION</b>		<b>CRI/CCT</b>		<b>DIMMING</b>		<b>COLOUR FINISH</b>
		VA-10101		250 7W		G		8030		ND		01 BLACK
								8040				02 DARK GREY
												03 WHITE
												05 MATT SILVER
												06 BRONZE
												S - SPECIAL FINISH

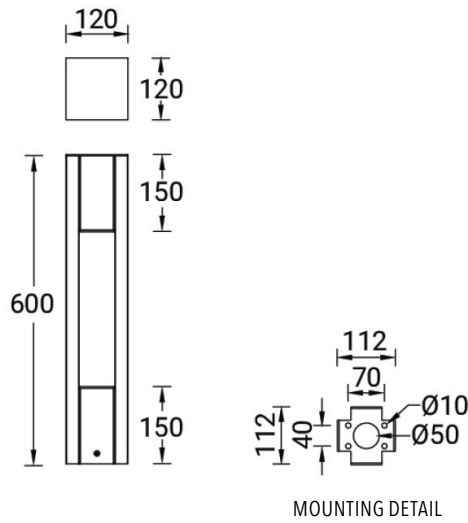

Accessories



Anchor Bolt  
LIGA - A12491