


STEAMER 2 (SE-90012)



Product description


Rectangular - Large



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- One IP68 connector supplied with 0.5 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Surge protection 10kV


Light symbol

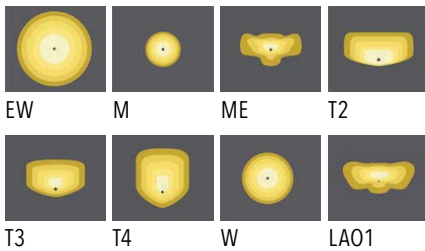

Product colour



Special finishes upon request

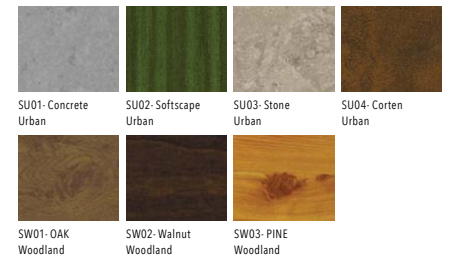

Technical information

Light source	4 x 24 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	10.1 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	209 W
Lumen	24479 - 28297 lm
Efficacy	117 - 135 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1400 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	EW [105°x115°], M [30°], ME [137°x58°], T2 [136°x51°], T3 [119°x86°], T4 [102°x74°], W [57°], LAO1 [151°x65°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000


STEAMER 2 (SE-90012)

Product variants

HOW TO SPECIFY

LIGA - SE-90012 - 1400 - LA01 - 8030 - ND - 01

MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
SE-90012	1400 209W	EW	8030	ND	01 BLACK
		M	8040	DALI	02 DARK GREY
		ME			03 WHITE
		T2			05 MATT SILVER
		T3			06 BRONZE
		T4			S - SPECIAL FINISH
		W			
		LA01			

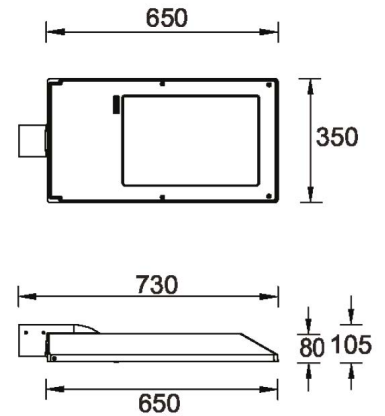

Accessories



Double adjustable 60°
LIGA-A91760



Double arm mount
LIGA-A91160



Double arm mount
LIGA-A91360



Double arm mount
LIGA-A91560



Single adjustable 60°
LIGA-A91660



Single arm mount
LIGA-A91060



Single arm mount
LIGA-A91260



Single arm mount
LIGA-A91460



Triple arm mount - Type 1
LIGA-A92260



Triple arm mount - Type 2
LIGA-A92360