

## Product description


Ø102 - 1000 mm - 2 sides - Round



## Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

## Light symbol



VW

## Product colour




01- Black (RAL 9011)    02- Dark Grey (RAL 7043)    03- White (RAL 9003)    05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

## Special finishes upon request



SU01- Concrete Urban    SU02- Softscape Urban    SU03- Stone Urban    SU04- Corten Urban



SW01- OAK Woodland    SW02- Walnut Woodland    SW03- PINE Woodland

## Technical information

Light source	2 x 1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	7.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	30 W
Lumen	2210 - 2238 lm
Efficacy	74 - 75 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	VW [74°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	55,000

JET 58 (JE-10583)

Product variants

HOW TO SPECIFY

LIGA	-	JE-10583	-	350	-	VW	-	8030	-	ND	-	01
		MODEL	OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH	
		JE-10583	350.30W		VW		8030		ND		01 BLACK	
							8040		DALI		02 DARK GREY	
											03 WHITE	
											05 MATT SILVER	
											06 BRONZE	
											S - SPECIAL FINISH	

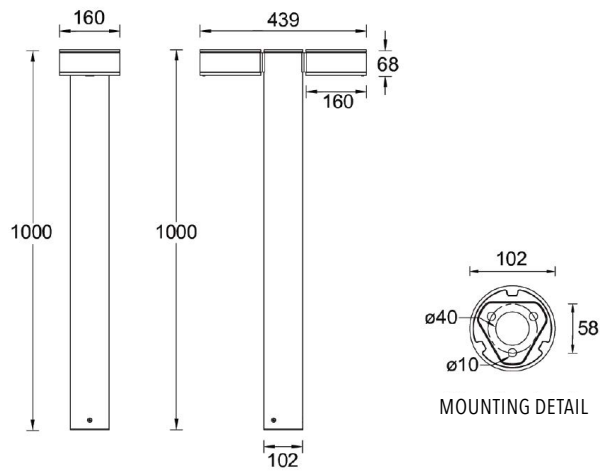

Accessories



Anchor Bolt  
LIGA - A10791