

ODESSA 12 (OD-50142)



Product description


Large - RGBW



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for OD-50142
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Arm mounting installation

Light symbol

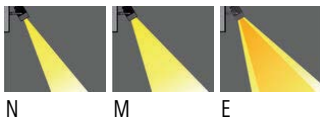

N M E

Product colour



01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)
06- Bronze (RAL 6014)

Special finishes upon request



SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban
SW01- OAK Woodland SW02- Walnut Woodland SW03- PINE Woodland

Technical information

Light source	7 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	5.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	33 W
Lumen	1192 - 1422 lm
Efficacy	36 - 43 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	N [20°], M [34°], E [24°x49°]
-------	-------------------------------

ODESSA 12 (OD-50142)

Product variants

HOW TO SPECIFY

LIGA - OD-50142 - 350 - M - RGBW30 - DMX/RDM - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
OD-50142	350 33W	N	RGBW30	DMX	01 BLACK	
		M	RGBW40	DMX/RDM	02 DARK GREY	
		E			03 WHITE	
					05 MATT SILVER	
					06 BRONZE	
					S - SPECIAL FINISH	

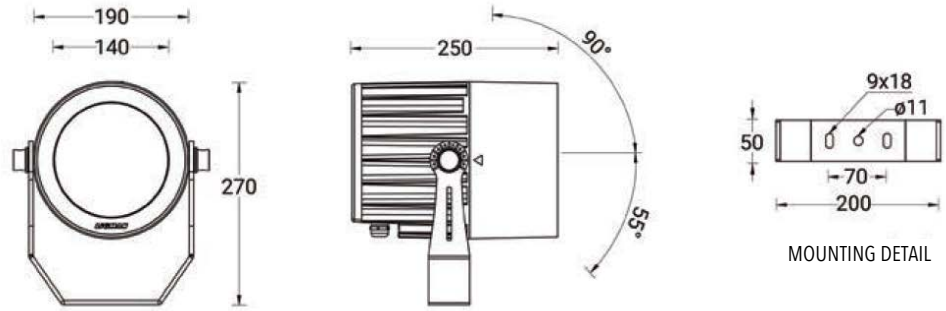

Accessories




Anti-glare visor
LIGA-A54431



Anti-glare louvre
LIGA-A54631



Linear spread lens
LIGA-A51814

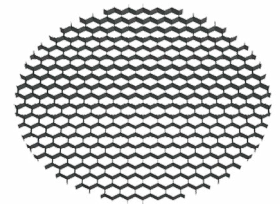

Honeycomb louvre
LIGA-A54121